


## Description

The PNMTAF500V25 is a high voltage MOSFET and is designed to have better characteristics, such as fast switching time, low gate charge, low on-state resistance and have a high rugged avalanche characteristics. This power MOSFET is usually used at high speed switching applications in power supplies, PWM motor controls, high efficient DC to DC converters and bridge circuits.


**TO-247 (Top View)**


MOSFET Product Summary		
$V_{DS}(V)$	$R_{DS(on)}(\Omega)$	$I_D(A)$
500	0.16 @ $V_{GS} = 10V$	25

## Feature

- Fast switching capability
- Avalanche energy tested
- Improved dv/dt capability, high ruggedness

## Mechanical Characteristics

- Case: TO-247-3L
- Approx. Weight: 6.3g (0.22oz)
- Lead free finish, RoHS compliant
- Case Material: "Green" molding compound, UL flammability classification 94V-0, "Halogen-free".


**Schematic diagram**

## Absolute maximum rating@25°C

Rating	Symbol	Value	Units
Drain-Source Voltage	$V_{DSS}$	500	V
Gate-Source Voltage	$V_{GSS}$	$\pm 30$	V
Drain Current-Continuous	$I_D$	Tc=25°C	25
		Tc=100°C	17.6
Pulsed Drain Current <sup>2)</sup>	$I_{DM}$	100	A
Avalanche Energy Single Pulsed <sup>3)</sup>	$E_{AS}$	780	mJ
Peak Diode Recovery dv/dt <sup>4)</sup>	dv/dt	50	V/ns
Maximum Power Dissipation	$P_D$	219	W
Thermal Resistance , Junction-case	$R_{\theta JC}$	0.57	°C/W
Thermal Resistance Junction-to-Ambient	$R_{\theta JA}$	62.5	°C/W
Junction and Storage Temperature Range	$T_J, T_{STG}$	-55~+150	°C

Notes:

1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating: Pulse width limited by maximum junction temperature.

3. L = 6.1mH,  $I_{AS} = 16A$ ,  $V_{DD} = 50V$ ,  $R_G = 25 \Omega$ , Starting  $T_J = 25^\circ C$

4.  $I_{SD} \leq 16A$ ,  $di/dt \leq 200A/\mu s$ ,  $V_{DD} \leq BV_{DSS}$ , Starting  $T_J = 25^\circ C$

## Electrical characteristics per line@25°C (unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
<b>Off Characteristics</b>						
Drain-Source Breakdown Voltage	$BV_{DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	500	-	-	V
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS} = 500V, V_{GS} = 0V$	-	-	1.0	$\mu A$
Gate-Body Leakage Current	$I_{GSS}$	$V_{GS} = \pm 30V, V_{DS} = 0V$	-	-	$\pm 100$	nA
<b>On Characteristics</b>						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	2.0	3.2	4.0	V
Drain-Source On-State Resistance	$R_{DS(ON)}$	$V_{GS} = 10V, I_D = 12.5A$	-	0.16	0.27	$\Omega$
<b>Dynamic Characteristics</b>						
Input Capacitance	$C_{iss}$	$V_{DS} = 25V, V_{GS} = 0V,$ $f = 1.0MHz$	-	2660	-	pF
Output Capacitance	$C_{oss}$		-	220	-	
Reverse Transfer Capacitance	$C_{rss}$		-	10.4	-	
<b>Switching Characteristics</b>						
Total Gate Charge <sup>1)</sup>	$Q_g$	$V_{DS} = 400V, V_{GS} = 10V$ $I_D = 25A, I_G = 1mA^{1) 2)}$	-	30	-	nC
Gate-Source Charge	$Q_{gs}$		-	8.0	-	
Gate-Drain Charge	$Q_{gd}$		-	12	-	
Turn-on Delay Time <sup>1)</sup>	$t_{d(on)}$	$V_{DS} = 250V, V_{GS} = 10V,$ $I_D = 25A, R_G = 25\Omega^{1) 2)}$	-	26	-	ns
Turn-on Rise Time	$t_r$		-	49	-	
Turn-Off Delay Time	$t_{d(off)}$		-	72	-	
Turn-Off Fall Time	$t_f$		-	40	-	
<b>Drain-Source Diode Characteristics</b>						
Diode Forward Current	$I_{SD}$		-	-	16	A
Pulsed Drain-Source Current	$I_{SM}$		-	-	64	A
Diode Forward Voltage <sup>1)</sup>	$V_{SD}$	$V_{GS} = 0V, I_S = 25A$	-	-	1.4	V
Reverse Recovery Time <sup>1)</sup>	$t_{rr}$	$V_{GS} = 0V, I_S = 25A,$ $di/dt = 100A/\mu s$	-	470	-	nS
Reverse Recovery Charge	$Q_{rr}$		-	5.0	-	$\mu C$

## Notes:

1. Pulse Test: Pulse width  $\leq 300\mu s$ , Duty cycle  $\leq 2\%$ .
2. Essentially independent of operating temperature.

## Typical Characteristics

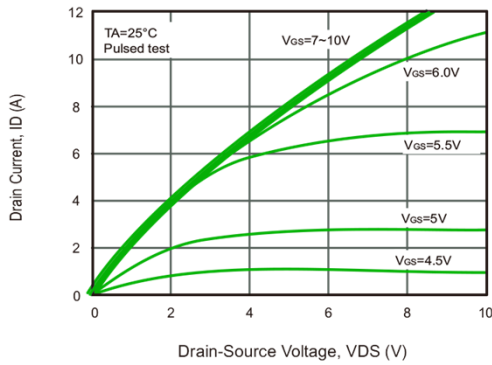


Fig.1 Drain Current vs. Gate-Source Voltage

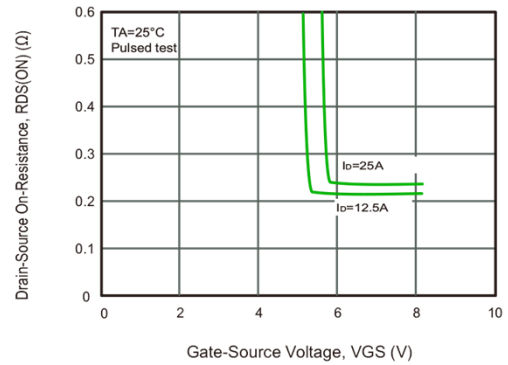


Fig.2 Drain-Source On-Resistance vs. Gate-Source Voltage

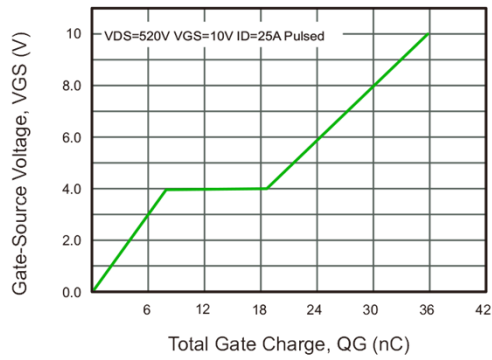


Fig.3 Gate Charge Characteristics

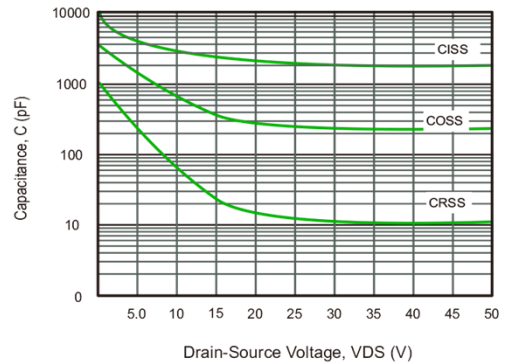


Fig.4 Capacitance Characteristics

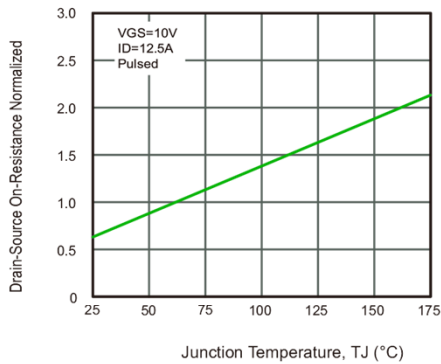


Fig.5 Drain-Source On-Resistance vs. Junction Temperature

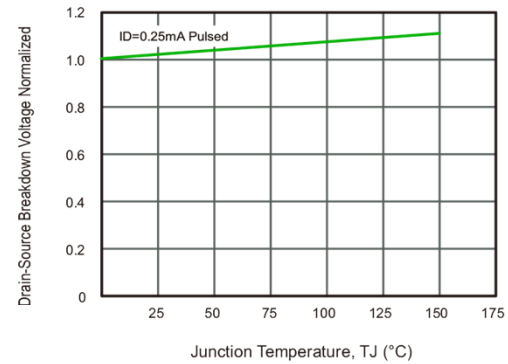


Fig.6 Breakdown Voltage vs. Junction Temperature

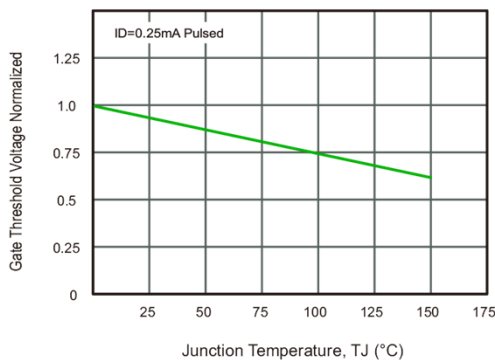


Fig.7 Gate Threshold Voltage vs. Junction Temperature

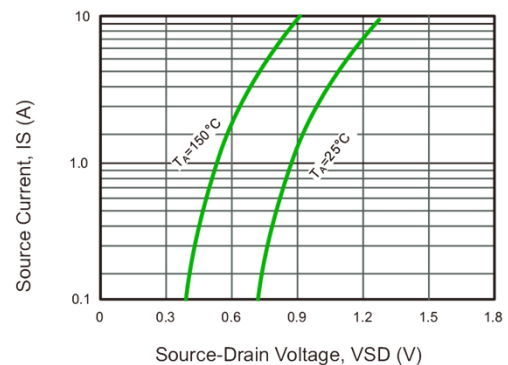


Fig.8 Source Current vs. Source-Drain Voltage

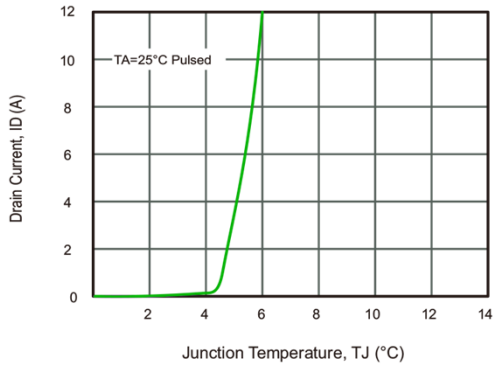


Fig.9 Drain Current vs. Gate-Source Voltage

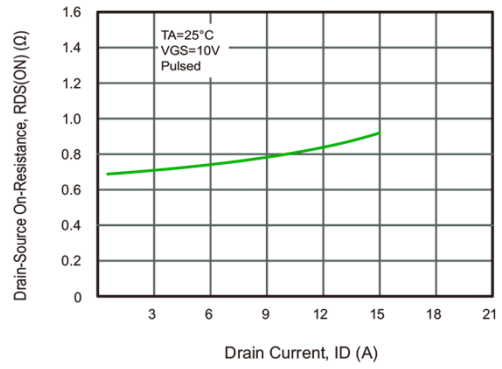


Fig.10 Drain-Source On-Resistance vs. Drain Current

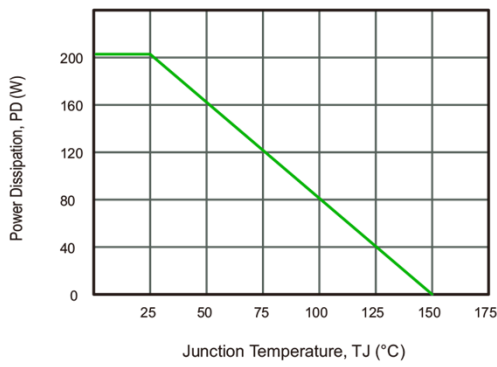


Fig.11 Power Dissipation vs. Junction Temperature

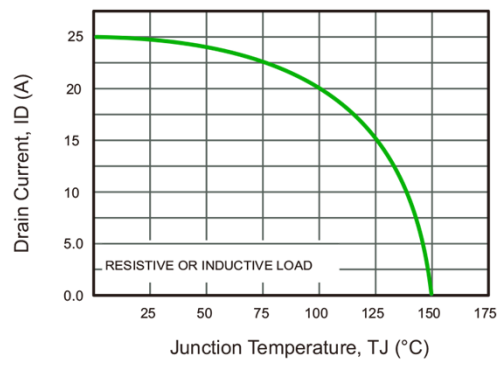


Fig.12 Drain Current vs. Junction Temperature


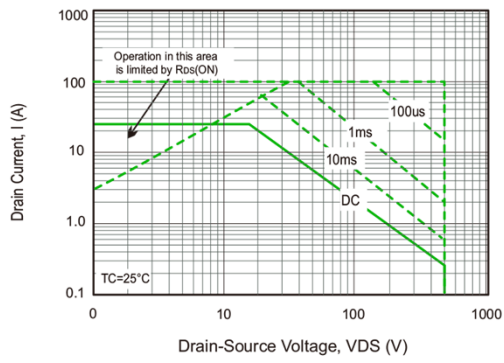



Fig.13 Safe Operating Area

## Product dimension (TO-247-3L)

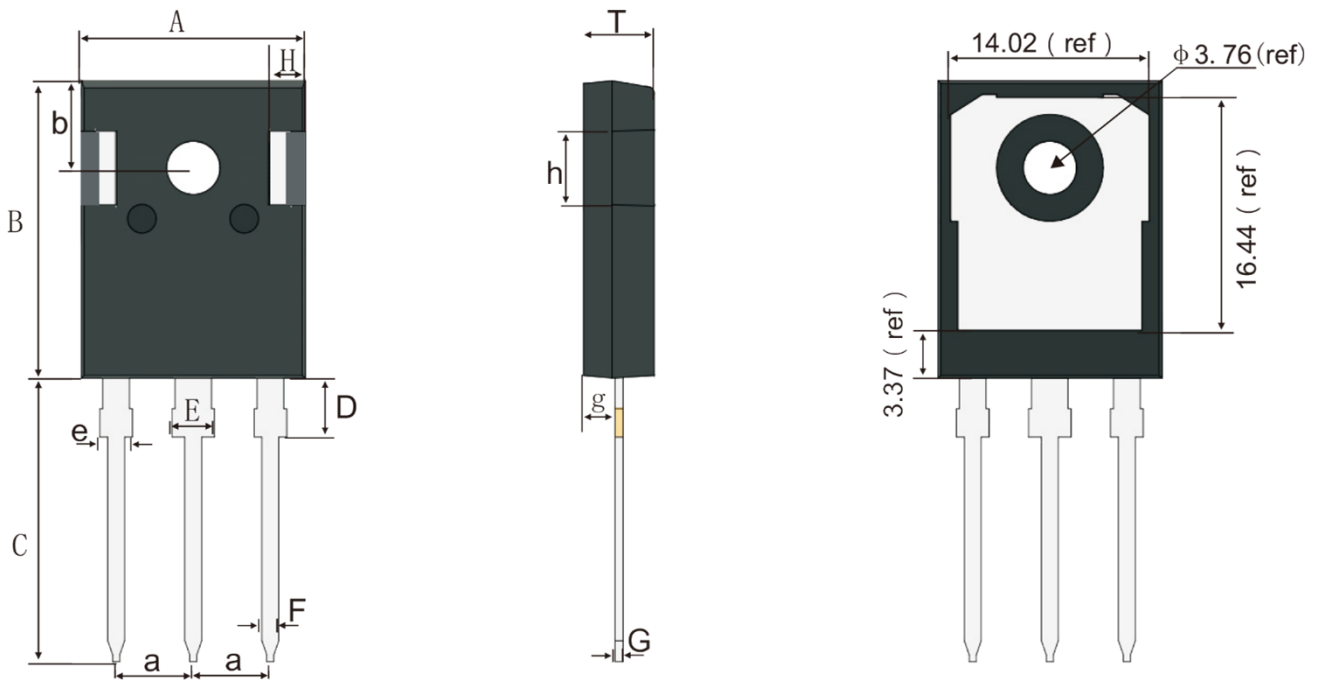

Dim	Millimeters		Inches	
	Min	Max	Min	Max
A	15.61	16.01	0.615	0.630
B	20.78	21.78	0.818	0.857
b	6.06	6.26	0.239	0.246
C	19.8	20.2	0.780	0.795
D	4.05	4.25	0.159	0.167
E	2.85	3.15	0.112	0.124
e	1.90	2.20	0.075	0.087
F	1.10	1.30	0.043	0.051
g	2.29	2.49	0.090	0.098
G	0.50	0.70	0.020	0.028
T	4.80	5.20	0.189	0.205
t	1.81	2.21	0.071	0.087
a	5.34	5.54	0.210	0.218
H	2.31	2.71	0.091	0.107
h	4.97	5.37	0.196	0.211


**IMPORTANT NOTICE**

 and **Prisemi**<sup>®</sup> are registered trademarks of **Prisemi Electronics Co., Ltd** (Prisemi), Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Website: <http://www.prisemi.com>

For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

 **Prisemi**<sup>®</sup> is a registered trademark of Prisemi Electronics.

All rights are reserved.