


Description

The P14C1S is an Over-Voltage-Protection (OVP) load switch with fixed 6.0V OVLO threshold voltage. The device will switch off internal MOSFET to disconnect IN to OUT to protect load when any of input voltage over the threshold. The Over temperature protection (OTP) function monitors chip temperature to protect the device. The OCP function turns off OUTPUT if the load current is over the threshold and recovers when VIN re-plug or CE reactive. The OCP current limit threshold is adjustable by an external R_{ILIM} . When the ILIM pin short to GND, the current limitation will be disable, the IC cut off the output voltage in heavy load conditions to protect IC from damage by OTP.

The P14C1S is available in SOT23-6L. Standard products are Pb-free and Halogen-free.

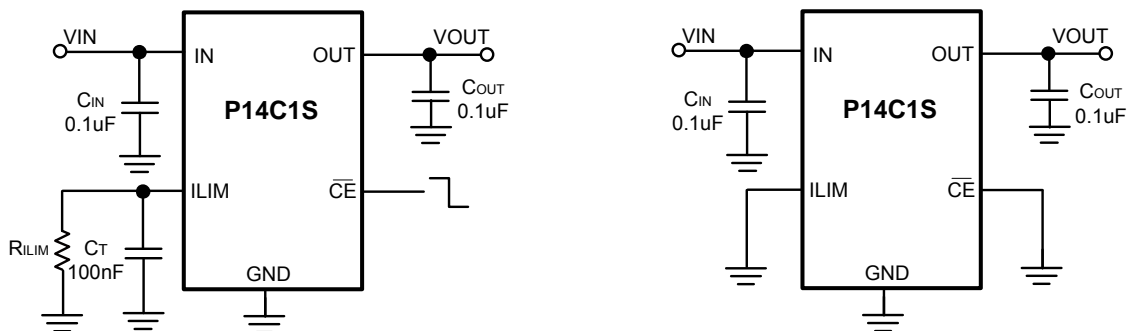

$C_T=100nF$ is recommended for $ILIM<1A$; C_T is optional for $ILIM\geq 1A$

Figure 1: Typical Application

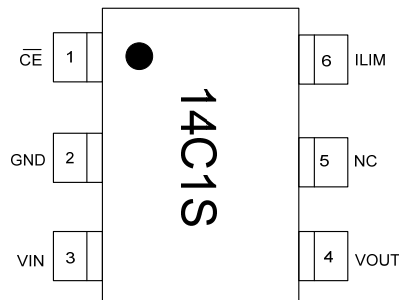


Figure 2: Pin order and Marking (Top view)

Feature

- Maximum input voltage : 32V
- Ultra fast OVP response time: 50ns (Typ.)
- Fixed OVLO threshold voltage: 6.0V, $\pm 3\%$
- Adjustable over-current protection:
100mA-1.2A, $\pm 10\%$
- Supports up to 1.2 A Load Current
- Thermal Shutdown
- Enable Function
- Fault Status Indication
- Available in Green SOT23-6L Package

Application

- Mobile Handsets and Tablets
- Portable Media Players
- Low-Power Handheld Devices

Pin Definitions

Pin No.	Symbol	Descriptions
1	\overline{CE}	Active-Low Chip Enable Input. Connect $\overline{CE} = \text{“HIGH”}$ to turn the input pass FET off. Connect $\overline{CE} = \text{“LOW”}$ to turn the internal pass FET on, connecting the input to the charging circuitry. CE is internally pulled down.
2	GND	Ground Terminal. Connect to the thermal pad and to the ground rail of the circuit.
3	IN	Switch Input and Device Power Supply.
4	OUT	Switch output Terminal to the Charging System.
5	NC	No Connect.
6	ILIM	Current limit adjustment. Connect a resistor to GND to set over current threshold. $I_{Lim} = 600/R_{ILIM}$. (current in A, resistance in Ω) Short ILIM to GND will disable current limitation.

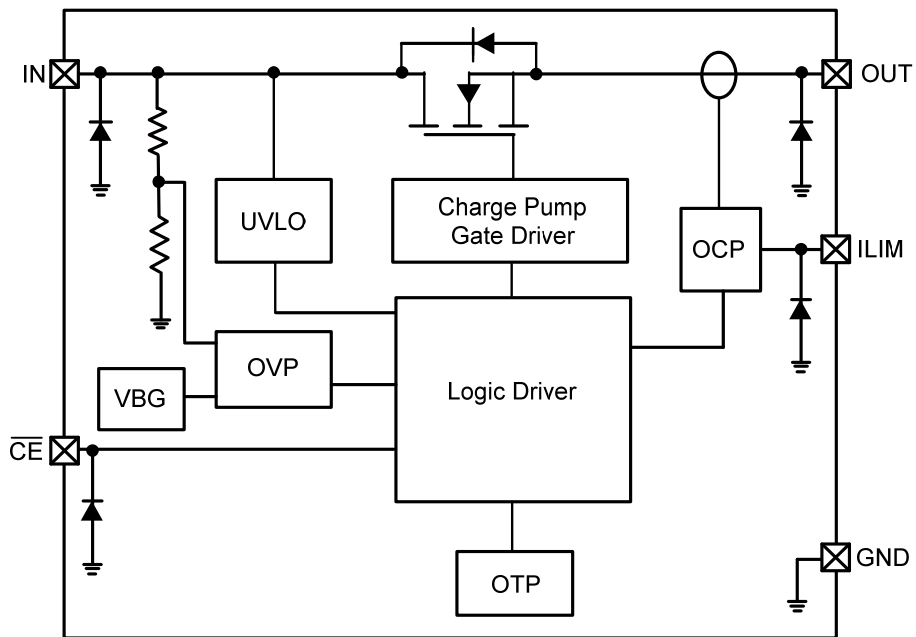


Figure 3: IC Block Diagram

Absolute maximum rating

Parameter(Note1)	Symbol	Value	Units
Input voltage (IN pin)	V_{IN}	-0.3 ~ 32	V
Output voltage (OUT pin)	V_{OUT}	-0.3 ~ 6.0	V
Junction temperature	T_J	150	°C
Lead temperature(10s)	T_L	260	°C
Storage temperature	T_{stg}	-55~150	°C
ESD Ratings	HBM	±2000	V
	CDM	±500	V

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Recommended Operating Conditions

Parameter	Symbol	Value	Units
Input voltage	V_{IN}	3.5~32	V
MAX Continuous Output current	I_{OUT}	1.2	A
Ambient operating temperature	T_{opr}	-40~85	°C


Over voltage protector

Electrical Characteristics



($T_A=25^{\circ}C$, $V_{IN}=5V$, $C_{IN}=0.1\mu F$, $C_{OUT}=0.1\mu F$, unless otherwise specified.)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Input voltage range	V_{IN}		3.5		32	V
Quiescent current	I_Q	NO Load, /CE=GND, $V_{IN}=5V$		120	200	μA
Over voltage quiescent current	I_{Q_OVP}	NO Load, /CE=GND, $V_{IN}=30V$		200		μA
Disable OVP quiescent current	I_{Q_DIS}	NO Load, /CE=5.5V, $V_{IN}=5.5V$		50	100	μA
On resistance	R_{on}	$V_{IN}=5V$, $I_{OUT}=1.0A$		200	280	$m\Omega$
OVP response time	t_{OVP}	V_{IN} rising, $C_{IN}=C_L=0pF$ (Note2)		50		ns
OVP voltage	V_{OVLO}	V_{IN} rising	5.82	6.0	6.18	V
/CE high threshold voltage	V_{CE_H}	V_{CE} Rising	1.4			V
/CE low threshold voltage	V_{CE_L}	V_{CE} Falling			0.4	V
UVLO threshold voltage	V_{UVLO}	V_{IN} rising		2.5		V
UVLO hysteresis voltage	V_{UVLO_HYS}	V_{IN} falling		25		mV
OCP setting range	I_{OCP_RANG}		100		1200	mA
OCP accuracy	I_{OCP_AC}	$R_{LIM}=560\Omega$	0.96	1.07	1.18	A
OCP Debounce Time @Start up	T_{DEB}	Start up from V_{IN} or /CE	10	18	30	ms
Turn On Time	T_{ON}	$V_{OUT}=V_{IN}*10\%$ to $V_{OUT}=V_{IN}*90\%$		40		μs
Output discharge resistance	R_{DCHG}	$V_{IN}=5V$		400		Ω
OTP threshold temperature	T_{OTP}	$V_{IN}=5V$		150		$^{\circ}C$
OTP hysteresis temperature	T_{HYS}	$V_{IN}=5V$		20		$^{\circ}C$

Note 2:Guaranteed by design

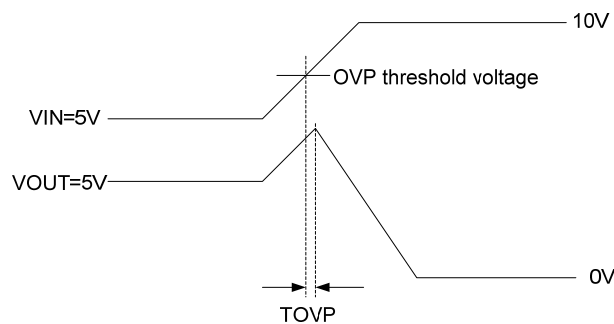

OVP response time test

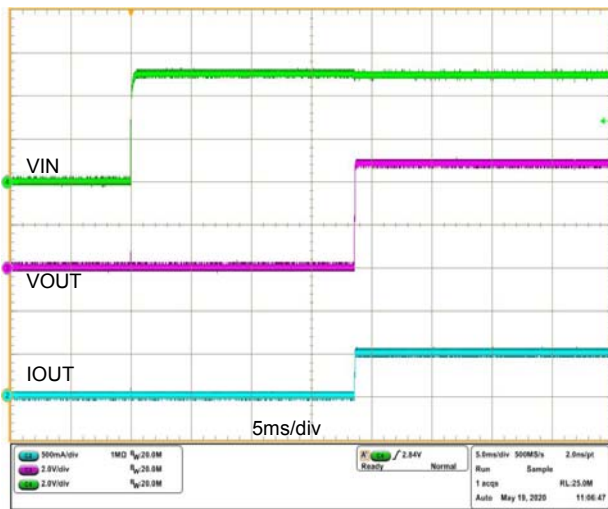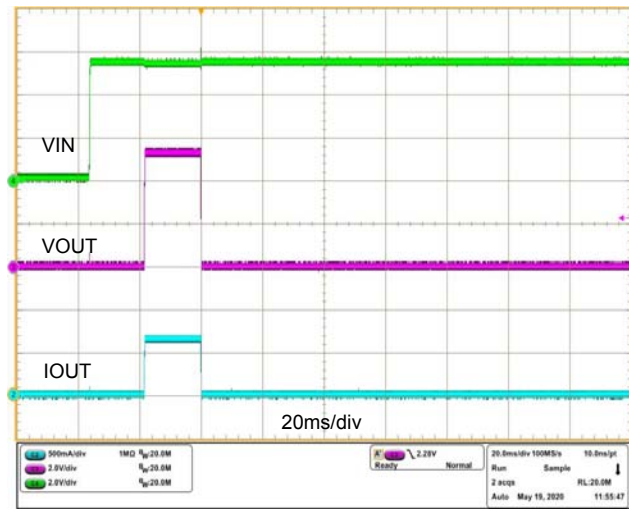Typical Operating Performance

 Power on Response($R_{out}=10\Omega, R_{ILIM}=1k\Omega$)

 Power on OCP Response($R_{out}=8\Omega, R_{ILIM}=1k\Omega$)

Function Descriptions

1. Under-voltage Lockout (UVLO)

The under-voltage lockout (UVLO) circuit disables the power switch until the input voltage reaches the UVLO turn on threshold. Built-in hysteresis prevents unwanted on and off cycling because of input voltage droop during turn on.

2. Over Current Protection (OCP)

If the load current rises to the OCP threshold, the device will cut off the output voltage. It takes 18ms after power on for OCP begins to detect. After Power Good, the OCP active time is dozens to hundreds microseconds. A recommended 100-220nF capacitor(C_T) connect on ILIM pin can increase the OCP active time for longer blanking time applications.


The OCP threshold is calculated by the equation: $I_{LIM} = 600/R_{ILIM}$ (current in A, resistance in Ω).

3. Over-voltage Lockout (OVLO)

When VIN exceeds the OVP threshold voltage, the over-voltage lockout (OVLO) circuit turns off the protected power switch.


4. Over Temperature Protection (OTP)

The P14C1S monitors its own internal temperature to prevent thermal failures. The chip turns off the power MOSFET when the internal temperature reaches 150°C, and will resume after the internal temperature is cooled down below 20°C. When the ILIM pin short to GND, the current limitation will be disable, but the IC still cut off the output voltage in heavy load conditions (about 1.7A to 2.0A load current, depend on the thermal diffusion) to protect IC from damage by OTP.

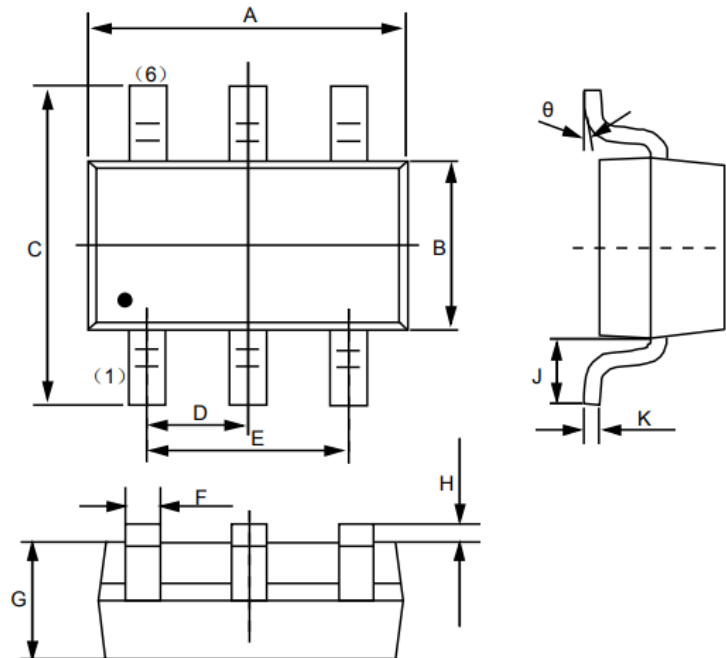Product dimension (SOT23-6L)


Dim	Millimeters		
	MIN	NOM	MAX
A	2.87	2.92	2.97
B	1.55	1.60	1.65
C	2.72	2.80	2.88
D	0.95BSC		
E	1.80	1.90	2.00
F	0.30	0.35	0.45
G	1.06	1.15	1.24
H	0.01	0.05	0.09
J	0.55	0.60	0.65
K	0.127REF		
θ	0°	---	8°


IMPORTANT NOTICE

 and **Prisemi**[®] are registered trademarks of **Prisemi Electronics Co., Ltd (Prisemi)** ,Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. “Typical” parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typical” must be validated for each customer application by customer’s technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Website: <http://www.prisemi.com>

For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

 **Prisemi**[®] is a registered trademark of Prisemi Electronics.

All rights are reserved.