

Description

The P14C3M is an Over-Voltage-Protection (OVP) load switch with programmable over current Threshold. The device will switch off internal MOSFET to disconnect IN to OUT to protect load when any of input voltage over the threshold. The current limit is adjustable by external resistor between ILIM and GND. The Over temperature protection (OTP) function monitors chip temperature to protect the device. The P14C3M is available in DFN1.2x1.6 package.

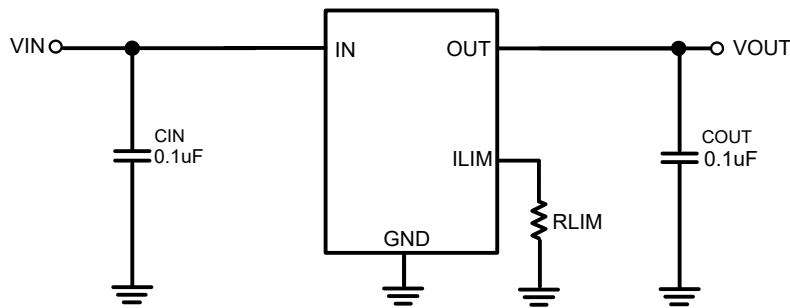


Figure 1: Typical Application

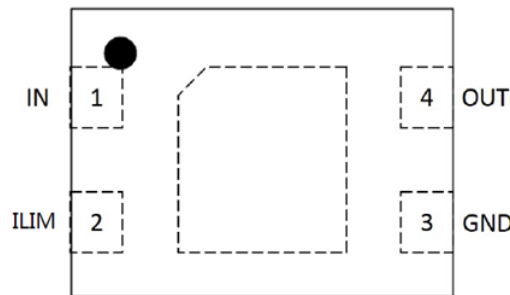


Figure 2: Pin order (Top view)

Feature

- Maximum input voltage: 40V
- Switch ON resistance: 105mΩ Typ.
- Ultra fast OVP response time: 50ns Typ.
- Programmed over-current protection: 200mA-3A
- Fixed internal OVLO threshold voltage: 6.0V, ±3%
- Over temperature protection

Application

- Mobile Handsets and Tablets
- Portable Media Players
- Peripherals

Over voltage and over current protector

Pin Definitions

Pin No.	Symbol	Descriptions
1	IN	Switch Input and Device Power Supply.
2	ILIM	Current limit adjustment. Connect a resistor to GND to set over current threshold. $I_{Lim} = 5.6 \div R3$ (current in A, resistance in k Ω). For example, $I_{Lim} = 1.0A$ if $R3 = 5.6k\Omega$. Short ILIM to GND will disable current limitation. An optional capacitor to GND for OCP response time setting.
3	GND	Ground.
4	OUT	Switch Output to Load.

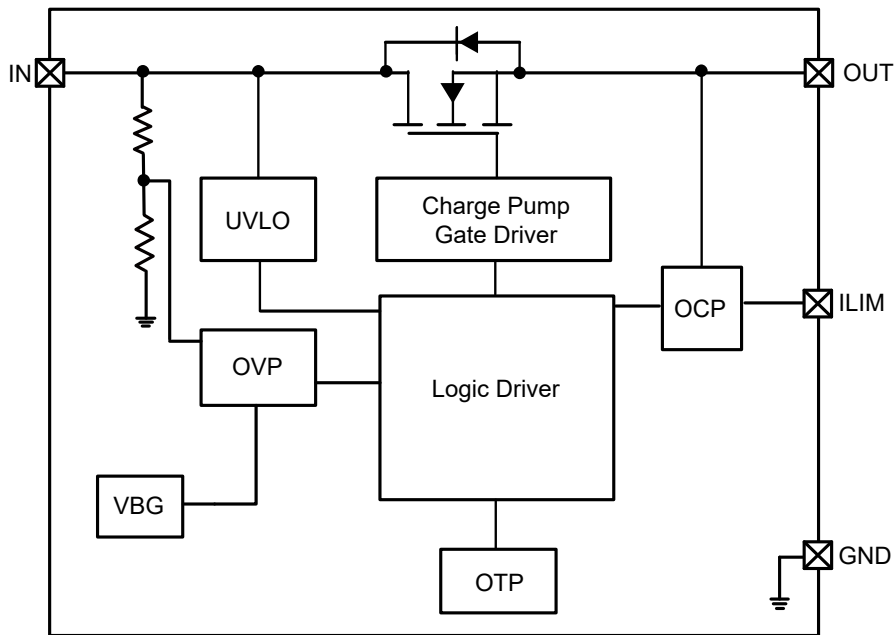


Figure 3: IC Block Diagram

Over voltage and over current protector
Absolute Maximum Rating

Parameter(Note1)	Symbol	Value	Units
Input voltage (IN pin)	V_{IN}	-0.3 ~ 40	V
Output voltage (OUT pin)	V_{OUT}	-0.3 ~ 20	V
Input voltage (OVLO, ILIM pin)	V_{OVLO}, V_{ILIM}	-0.3 ~ 6.0	V
Junction temperature	T_J	150	°C
Lead temperature(10s)	T_L	260	°C
Storage temperature	T_{stg}	-55~150	°C

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Recommended Operating Conditions

Parameter	Symbol	Value	Units
Input voltage	V_{IN}	3.5~40	V
MAX Continuous Output current	I_{OUT}	2	A
Ambient operating temperature	T_{opr}	-40~85	°C

Over voltage and over current protector
Electrical Characteristic

 (T_A=25°C, V_{IN}=5V, C_{IN}=0.1uF, C_{OUT}=0.1uF, unless otherwise specified.)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
General Function						
Input voltage range	V _{IN}		3.5		40	V
Quiescent current	I _Q	No Load, OVLO=GND, V _{IN} =5V		93		uA
Over voltage quiescent current	I _{Q_OVP}	No Load, OVLO=GND, V _{IN} =30V		114		uA
ON resistance	R _{DS(ON)}	V _{IN} =5V, I _{OUT} =1A		105		mΩ
Power on delay time	T _{ON_DELAY}	V _{IN} =0V to 5V		10		ms
Turn On Time	T _{ON}	V _{OUT} =V _{IN} *10% to V _{OUT} =V _{IN} *90%		180		us
OVP Function						
OVP response time	T _{OVP}	V _{IN} Rising, C _{IN} =C _L =0pF		50		ns
OVP voltage	V _{OVP}		5.82	6.0	6.18	V
OVP hysteresis voltage	V _{OVP_HYS}			0.2		V
Output discharge resistance	R _{DCHG}	V _{IN} =5V		230		Ω
OCP Function						
OCP current	I _{OCP}	Current Rising	200		3000	mA
OCP accuracy	ACCURACY_I _{OCP}	I _{OCP} <1A	- 15		+ 15	%
		I _{OCP} ≥ 1A	- 10		+ 10	%
OCP deglitch time	T _{DEGLITCH_OCP}			3		ms
OCP detect delay time at start-up	T _{OCP}	V _{IN} =0V to 5V		20		ms
Over current recover delay time	T _{OCCR}			18		s
SCP Function						
Current Limit at SCP	I _{SHORT_LIMIT}			0.7		A
SCP deglitch time	T _{DELAY_SHORT}			3		ms
Short recover delay time	T _{SCR}			18		s
OTP Function						
OTP threshold temperature	T _{OTP}	V _{IN} =5V		150		°C
OTP hysteresis temperature	T _{HYS}	V _{IN} =5V		20		°C

Typical Operating Performance

($T_A=25^{\circ}\text{C}$, $V_{IN}=5\text{V}$, $V_{CTRL}=5\text{V}$, unless otherwise specified.)

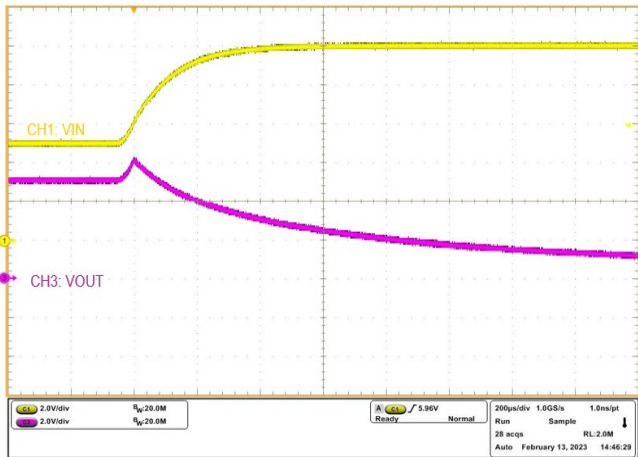


Figure 6. OVP Response

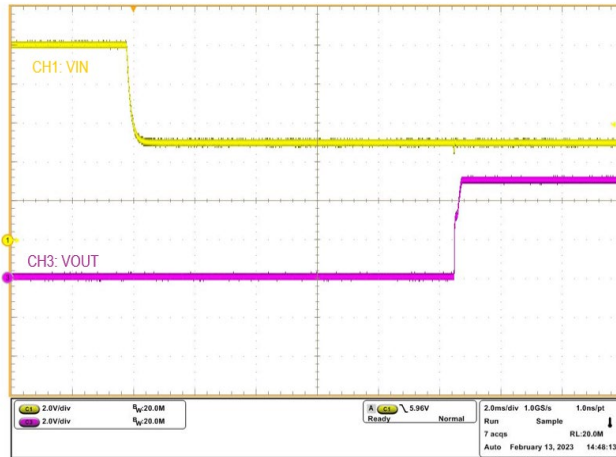


Figure 7. OVP Recovery Response

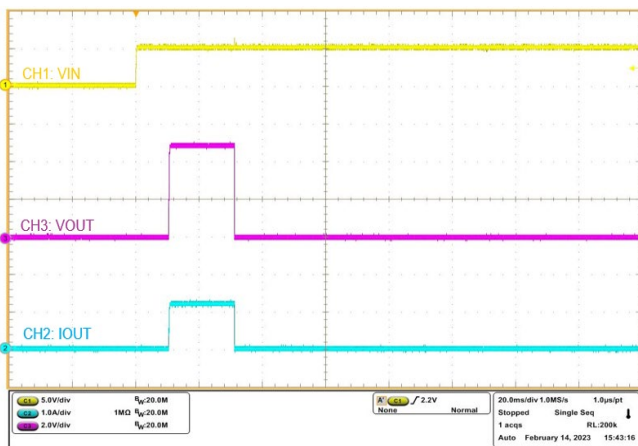


Figure 8. OCP Response at Start-up
($R_{load}=4\Omega$, $R_{lim}=5.6\text{k}\Omega$)

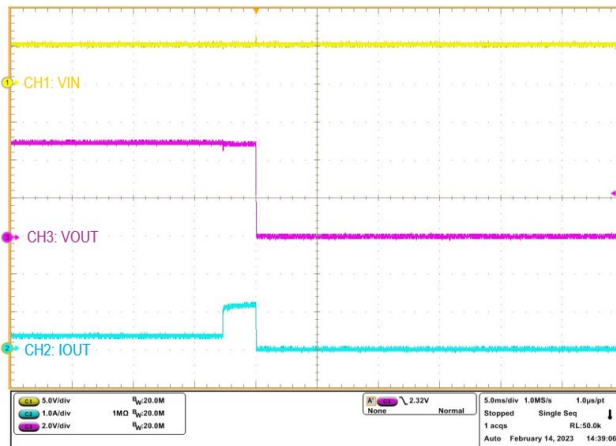


Figure 9. OCP Response after Start-up
($R_{load}=14\Omega$ to 4Ω , $R_{lim}=5.6\text{k}\Omega$)

Function Descriptions**Over Current Protection (OCP)**


The Over Current threshold can adjustable by a external resistor RSET connected from the ILIM pin to GND. The OCP threshold is calculated by the equation:

$$I_{OCP} = 5.6 \div R3 \text{ (current in A, resistance in k}\Omega\text{)}$$

If the output current exceed the I_{OCP} threshold, the device limits the current for a blanking duration of T_{OCP} . If the over current situation exceeds the T_{OCP} , the switch will turned off, and the Fault pin is go low. The switch will re-soft start again after T_{OCR} .


Over Temperature Protection (OTP)

The device monitors the internal junction temperature to provide thermal shutdown. When IC junction temperature exceeds T_{OTP} (150 °C), the switch is turned off. The output will restart when IC junction temperature is below T_{OTP} (150°C) - T_{HYS} (20°C).

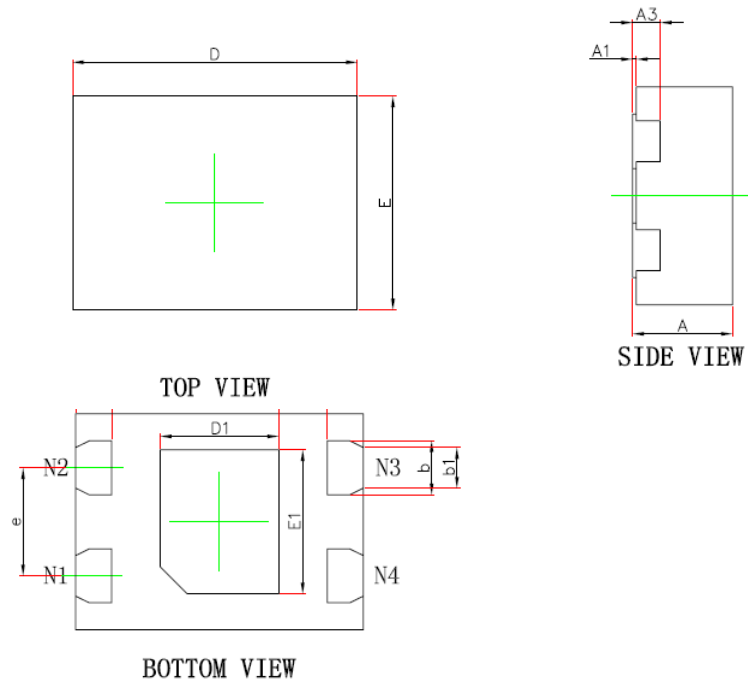Product Dimension (DFN1.2X1.6)


Dim	Millimeters	
	MIN	MAX
A	0.500	0.600
A1	0.000	0.050
A3	0.152REF	
D	1.500	1.700
E	1.100	1.300
D1	0.560	0.760
E1	0.700	0.900
b	0.250	0.350
b1	0.175	0.275
e	0.600TYP	
L	0.150	0.250
k	0.200MIN	

IMPORTANT NOTICE

 and **Prisemi**[®] are registered trademarks of **Prisemi Electronics Co., Ltd (Prisemi)** ,Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. “Typical” parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typical” must be validated for each customer application by customer’s technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Prisemi reserves the right to change the circuitry and/or specifications without notice at any time. Customers should obtain the latest relevant information and datasheets before placing orders and should verify that such information is current and complete.

Website: <http://www.prisemi.com>

For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

Prisemi[®] is a registered trademark of Prisemi Electronics.

All rights are reserved.